



## MIDILED XRS40

40 Watts / 4000 Lumens / 90+ CRI

Recessed LED downlight with adjustable 'pull-out' gimbal design for versatile lighting applications. Wide beam angle and 80° tilt adjustment allows for perfect illumination for vertical shelves, signage and merchandising. Featuring a high output 40W Japanese made LED with a high colour rendering index (CRI) of 90+ and COB lumen output. Anodized black heatsink provides effective thermal management ensuring high output and long lifespan. Supplied with remote electronic driver.

Input Voltage 240V

IP Rating IP20

System Power 41.8W


LED Power 40W

Cut-Out 180mm

Tilt-Angle 80°

Rotation 355°

### XRS40 Dimensions

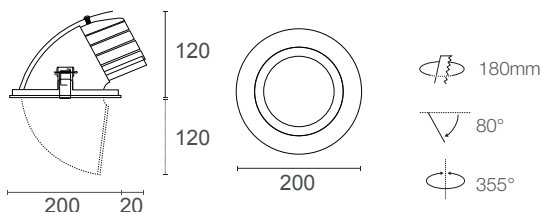


### XRS40 Technical Specifications

	3000K	4000K	5000K
COB Lumen Output	3800 lm	4000 lm	4200 lm
Lifetime	50,000hrs (L70)		
Power Factor	> 0.95		
Input Voltage	100V - 240V AC 50/60 Hz		
Protection	Thermal and Short Circuit		
Dimming	DALI* 1-10v* Available on request		

### XRS40 Trim Colours



### XRS40 Order Code

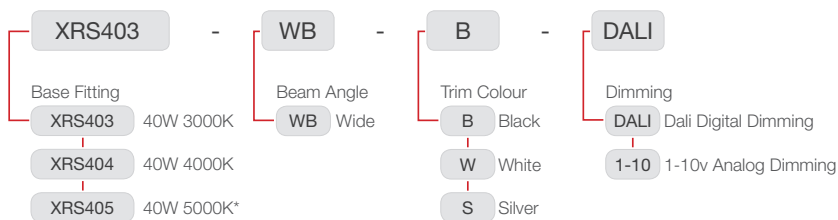

**TREND**  
LIGHT BY SOLID STATE

33-37 Mentmore Ave Rosebery NSW 2018  
Ph: (02) 9319 4044 Fax: (02) 9319 6222 Email: sales@trendlighting.com.au

