



Scan to explore
XDL40 online

Maxiled XDL40

35W Adjustable Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XDL40	2.7 (2700K)	(CRI 90+ Standard)	MB (Medium)	W (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	WB (Wide)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)			ND (Non-dimmable)
	4 (4000K)				

Order Code **XDL404-WB-W-ND**




To configure this downlight, please visit
trendlighting.com.au/product/maxiled-XDL40

Physical Characteristics

Trim Colour	White Black
Tilt Angle	50°
Dimensions	Ø180 x 155 (H) mm
Spring Height	35 mm
Cutout	Circular 150 mm
Weight	1200 g

Dimensions (mm)

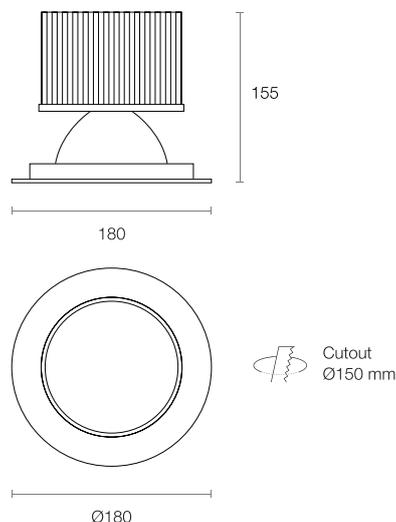

Product Features

- Recessed adjustable LED downlight available in a wide choice of trim colours and configurable inserts
- Equipped with large pressure cast aluminium heatsink for effective thermal management and sealed face with silicone gasket for increased ingress protection
- Alternate power options and sizes available ([XDL35](#) and [XDL55](#))
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 97+ and CRI 93+ VIVID available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver

Product Attributes



Technical Characteristics

Based on XDL404-WB-W-WI-ND

LED Power	35W
LED Type	COB
Lumen Output	4746 lm
Luminous Flux	3333 lm
Efficacy	88.88 lm/W
Colour Temperature	2700K 3000K 3500K 4000K
Colour Technology	CRI 90+ CRI 93+ VIVID CRI 97+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Medium Wide
System Power	37.5W Typical
Driver Model	Trend 150026-1000 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	30-40V DC 1000mA
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge DALI Non-dimmable

General Characteristics

Category	Downlights
Family	Maxiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP20



Scan to explore
XDL40 online

Maxiled XDL40

35W Adjustable Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XDL40	2.7 (2700K)	(CRI 90+ Standard)	MB (Medium)	W (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	WB (Wide)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)			ND (Non-dimmable)
	4 (4000K)				

Order Code **XDL404-WB-W-ND**

To configure this downlight, please visit
trendlighting.com.au/product/maxiled-XDL40

Trim Colour



W
White Trim



B
Black Trim