



Scan to explore  
XDC10 online

# Miniled XDC10

10W Recessed Adjustable Downlight

| Product Code | Colour Temperature | Colour Technology    | Beam Angle  | Trim Colour | Driver                       |
|--------------|--------------------|----------------------|-------------|-------------|------------------------------|
| XDC10        | 2.7 (2700K)        | (CRI 90+ Standard)   | NB (Narrow) | W (White)   | LT (Leading & Trailing Edge) |
|              | 3 (3000K)          | V (CRI 93+ VIVID)    | MB (Medium) | B (Black)   | DALI (DALI)                  |
|              | 3.5 (3500K)        | R (CRI 97+ Standard) | WB (Wide)   | S (Silver)  | 110V (1-10V)                 |
|              | 4 (4000K)          |                      |             |             |                              |

Order Code **XDC104-WB-W-LT**



## Product Features

- Recessed adjustable LED downlight with exceptional light output and quality
- Manufactured with an aluminium body and powder coat finish
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 93+ VIVID and CRI 97+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver

## Product Attributes





To configure this downlight, please visit  
[trendlighting.com.au/product/miniled-XDC10](http://trendlighting.com.au/product/miniled-XDC10)

## Physical Characteristics

|               |                        |
|---------------|------------------------|
| Trim Colour   | White   Black   Silver |
| Tilt Angle    | 30°                    |
| Dimensions    | Ø105 x 75 (H) mm       |
| Spring Height | 20 mm                  |
| Cutout        | Circular 92 mm         |
| Weight        | 315 g                  |

## Dimensions (mm)

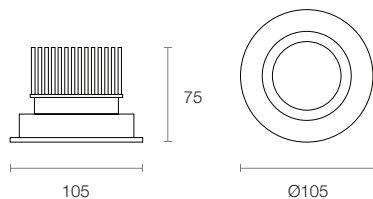

 Cutout Ø92 mm

## Technical Characteristics

Based on XDC104-WB-W-LT

|                    |                                   |
|--------------------|-----------------------------------|
| LED Power          | 10W                               |
| LED Type           | COB                               |
| Lumen Output       | 1450 lm                           |
| Luminous Flux      | 1142 lm                           |
| Efficacy           | 97.61 lm/W                        |
| Colour Temperature | 2700K   3000K   3500K   4000K     |
| Colour Technology  | CRI 90+   CRI 93+ VIVID   CRI 97+ |
| Colour Deviation   | SDCM ≤ 3                          |
| Lifetime           | 50,000 hours (L80)                |
| Beam Angle         | Narrow   Medium   Wide            |

|              |  |
|--------------|--|
| System Power | 11.7W Typical                          |
| Driver Model | Trend 150218-300 (L&T)                 |
| Input        | 180-265V AC 50/60 Hz                   |
| Output       | 30-42V DC 300mA                        |
| Power Factor | >0.93                                  |
| Protection   | OVP, OTP, OCP, SCP, OPP                |
| Dimming      | Leading & Trailing Edge   DALI   1-10V |

## General Characteristics

|                    |            |
|--------------------|------------|
| Category           | Downlights |
| Family             | Miniled    |
| Surface            | Ceiling    |
| Mounting           | Recessed   |
| Insulation Contact | CA90       |
| Ingress Protection | IP20       |



Scan to explore  
XDC10 online

# Miniled XDC10

10W Recessed Adjustable Downlight

| Product Code | Colour Temperature | Colour Technology    | Beam Angle  | Trim Colour | Driver                       |
|--------------|--------------------|----------------------|-------------|-------------|------------------------------|
| <b>XDC10</b> | 2.7 (2700K)        | (CRI 90+ Standard)   | NB (Narrow) | W (White)   | LT (Leading & Trailing Edge) |
|              | 3 (3000K)          | V (CRI 93+ VIVID)    | MB (Medium) | B (Black)   | DALI (DALI)                  |
|              | 3.5 (3500K)        | R (CRI 97+ Standard) | WB (Wide)   | S (Silver)  | 110V (1-10V)                 |
|              | 4 (4000K)          |                      |             |             |                              |

Order Code **XDC104-WB-W-LT**

To configure this downlight, please visit  
[trendlighting.com.au/product/miniled-XDC10](http://trendlighting.com.au/product/miniled-XDC10)

## Trim Colour



W  
**White Trim**



B  
**Black Trim**



S  
**Silver Trim**