



Scan to explore
LSM5 online

Slot LSM5

10W Surface Mounted Miniature Linear Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
LSM5	3 (3000K)	(CRI 90+ Standard)	WB (Wide)	W (White)	LT (Leading & Trailing Edge)
	4 (4000K)			B (Black)	

Order Code **LSM54-WB-W-LT**



Product Features

- Surface mounted miniature LED linear downlight crafted with aesthetics and visual comfort in mind
- Equipped with 5 deep set light optics specifically designed for glare control, minimising the presence of the luminaire within the field of vision
- CRI 90+ available in 3000K and 4000K CCT options
- Supplied with a remote driver and 240V flex and plug

Product Attributes




To configure this downlight, please visit
trendlighting.com.au/product/slot-LSM5

Physical Characteristics

Trim Colour	White Black
Dimensions (LxWxH)	140 x 47 x 52 mm
Weight	220 g

Dimensions (mm)

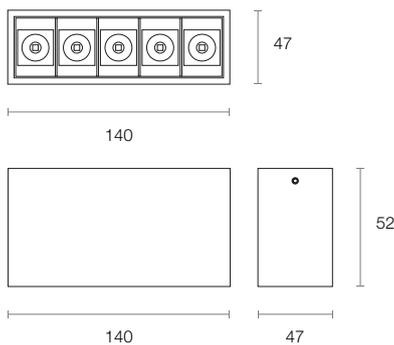

Technical Characteristics

Based on LSM54-WB-W-LT

LED Power	10W
LED Type	COB
Lumen Output	1223 lm
Luminous Flux	1002 lm
Efficacy	80.81 lm/W
Colour Temperature	3000K 4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L70)
Beam Angle	Wide

System Power	12.4W Typical
Driver Model	Trend 150013-700 (L&T)
Input	180-265V AC 50/60 Hz
Output	11-18V DC 700mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge

General Characteristics

Category	Downlights, Linears & Battens
Family	Slot
Surface	Ceiling
Mounting	Surface Mounted
Ingress Protection	IP20



Scan to explore
[LSM5 online](#)

Slot LSM5

10W Surface Mounted Miniature Linear Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
LSM5	3 (3000K)	(CRI 90+ Standard)	WB (Wide)	W (White)	LT (Leading & Trailing Edge)
	4 (4000K)			B (Black)	

Order Code **LSM54-WB-W-LT**

To configure this downlight, please visit
trendlighting.com.au/product/slot-LSM5

Trim Colour



W
White Trim



B
Black Trim