



Scan to explore  
XTLX1200 online

# Track Linear XTLX1200

30W Track Mounted Adjustable Linear

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XTLX1200	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable)
	3 (3000K)			B (Black)	
	3.5 (3500K)				
	4 (4000K)				

Order Code **XTLX12004-VW-B-ND**



## Product Features

- Track mounted adjustable linear light with slim profile known for its adjustable design and versatility
- Adjustable brackets provide 355° tilt for flexible illumination options
- Manufactured from extruded aluminium with powder coat finish and opal acrylic diffuser for smooth beam distribution
- Customisable lengths and other lumen package options are available upon request
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options
- Supplied with an integral driver and 3 circuit track adapter

## Product Attributes




To configure this track light please visit

[trendlighting.com.au/product/track-linear-XTLX1200](http://trendlighting.com.au/product/track-linear-XTLX1200)

## Physical Characteristics

Trim Colour	White   Black
Tilt Angle	355°
Dimensions (LxWxH)	1148 x 40 x 120 mm
Weight	1240 g

## Dimensions (mm)

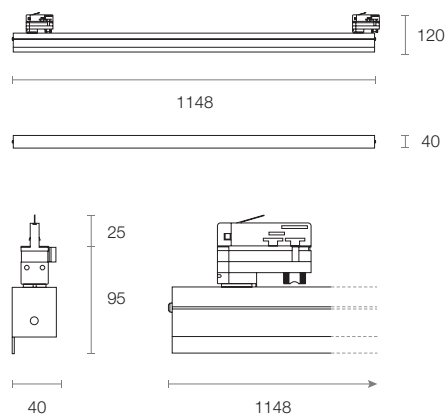

## Technical Characteristics

Based on XTLX12004-VW-B-ND

LED Power	30W
LED Type	SMD
Lumen Output	4464 lm
Luminous Flux	2610 lm
Efficacy	76.76 lm/W
Colour Temperature	2700K   3000K   3500K   4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L80 B10)
Beam Angle	Very Wide

System Power	34W Typical
Driver Model	Trend 150058 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	20V DC 2000mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable

## General Characteristics

Category	Track Systems (Track Light)
Family	Track Linear
Surface	Ceiling
Mounting	Track Mounted
Ingress Protection	IP20



Scan to explore  
XTLX1200 online

# Track Linear XTLX1200

30W Track Mounted Adjustable Linear

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
<b>XTLX1200</b>	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable)
	3 (3000K)			B (Black)	
	3.5 (3500K)				
	4 (4000K)				


Order Code **XTLX12004-VW-B-ND**

To configure this track light please visit  
[trendlighting.com.au/product/track-linear-XTLX1200](http://trendlighting.com.au/product/track-linear-XTLX1200)

## Trim Colour




W  
White Trim

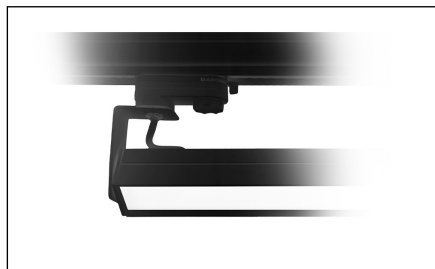


B  
Black Trim


## Compatible 3 Circuit Track Systems




**TRA3C**  
3 Circuit Track  
Dimensions 33 x 35 mm  
Max. Continuous Length 3000 mm  
Track Colour White | Black | Silver

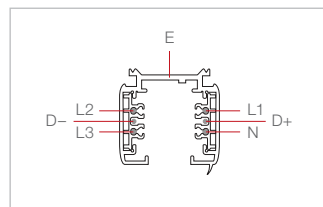

**TRA3C-DALI**  
3 Circuit DALI Track  
Dimensions 33 x 35 mm  
Max. Continuous Length 3000 mm  
Track Colour White | Black | Silver

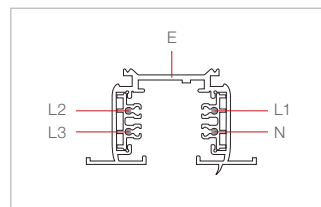

**TRA3CR**  
3 Circuit Recessed Track  
Dimensions 56.2 x 35 mm  
Max. Continuous Length 3000 mm  
Track Colour White | Black | Silver

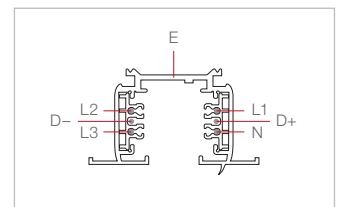

**TRA3CR-DALI**  
3 Circuit Recessed DALI Track  
Dimensions 56.2 x 35 mm  
Max. Continuous Length 3000 mm  
Track Colour White | Black | Silver