



Scan to explore  
XTB35 online

# Track Spot XTB35

35W Architectural Premium Track Spot

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XTB35	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	TE (Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)		
	4 (4000K)				
	5 (5000K)				

Order Code **XTB354-WB-B-TE**




To configure this track light please visit  
[trendlighting.com.au/product/track-spot-XTB35](http://trendlighting.com.au/product/track-spot-XTB35)

## Physical Characteristics

Trim Colour	White   Black
Tilt Angle	90°
Rotation	350°
Dimensions	Ø115 x 216 (H) mm
Weight	1861 g

## Dimensions (mm)

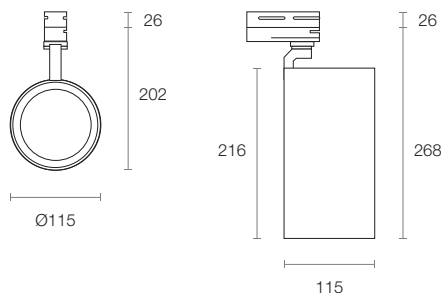

## Product Features

- Track mounted premium LED spotlight designed to make an architectural statement and a practical solution for track installations
- Built from an aluminium powder coated body, featuring a high efficiency collimating lens for smooth and even light distribution
- Also available in other variations ([XTB10](#) and [XTB25](#))
- CRI 90+ available in 2700K, 3000K, 3500K, 4000K and 5000K CCT options; CRI 97+ and CRI 93+ VIVID available in 2700K, 3000K, and 4000K CCT options
- Supplied with a 3-circuit track adapter and an integral driver

## Product Attributes



## Technical Characteristics

Based on XTB354-WB-B-TE

LED Power	35W
LED Type	COB
Lumen Output	3322 lm
Luminous Flux	2694 lm
Efficacy	71.84 lm/W
Colour Temperature	2700K   3000K   3500K   4000K   5000K
Colour Technology	CRI 90+   CRI 93+ VIVID   CRI 97+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Narrow   Medium   Wide
System Power	37.5W Typical
Driver Model	Trend 150081-800 (T/E)
Input	220-240V AC 50/60 Hz
Output	25-40V DC 800mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Trailing Edge   DALI

## General Characteristics

Category	Track Systems (Track Light)
Family	Track Spot
Surface	Ceiling
Mounting	Track Mounted
Ingress Protection	IP20



Scan to explore  
XTB35 online

# Track Spot XTB35

35W Architectural Premium Track Spot

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
<b>XTB35</b>	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	TE (Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)		
	4 (4000K)				
	5 (5000K)				

Order Code **XTB354-WB-B-TE**

To configure this track light please visit  
[trendlighting.com.au/product/track-spot-XTB35](http://trendlighting.com.au/product/track-spot-XTB35)

## Trim Colour




W  
White Trim




B  
Black Trim


## Compatible 3 Circuit Track Systems




**TRA3C**  
3 Circuit Track  
Dimensions 33 x 35 mm  
Max. Length 3000 mm  
White | Black | Silver




**TRA3C-DALI**  
3 Circuit DALI Track  
Dimensions 33 x 35 mm  
Max. Length 3000 mm  
White | Black | Silver




**TRA3CR**  
3 Circuit Recessed Track  
Dimensions 56.2 x 35 mm  
Max. Length 3000 mm  
White | Black | Silver



**TRA3CR-DALI**  
3 Circuit Recessed DALI Track  
Dimensions 56.2 x 35 mm  
Max. Length 3000 mm  
White | Black | Silver



**TRA3C-SA**  
3 Circuit Surface Mounted Monopoint  
Dimensions Ø110 x 35 mm  
White | Black



**TRA3C-DALI-SA**  
3 Circuit Surface Mounted DALI Monopoint  
Dimensions Ø143 x 35 mm  
White | Black