



Scan to explore
XTI15 online

Track Spot XTI15

15W Track Mounted Spotlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Accessories *	Driver
XTI15	2.7 (2700K)	(CRI 90+ Standard)	WB (Wide)	W (White)	HL (Honeycomb Lens)	ND (Non-dimmable)
	3 (3000K)	V (CRI 93+ VIVID)		B (Black)		DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)				
	4 (4000K)					

Order Code **XTI154-WB-B-ND**

* Optional accessories



Product Features

- Track mounted LED spotlight featuring square face and collimating lens
- Fully adjustable design with 350° rotation and 90° tilt angle, allowing for directional adjustment in a variety of lighting applications
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 97+ and CRI 93+ VIVID available in 2700K, 3000K, and 4000K CCT options
- Supplied with a 3-circuit track adapter and an integral driver
- Optional honeycomb lens available

Product Attributes




To configure this track light please visit
trendlighting.com.au/product/track-spot-XTI15

Physical Characteristics

Trim Colour	White Black
Tilt Angle	90°
Rotation	350°
Dimensions (LxWxH)	90 x 90 x 141 (H) mm
Weight	1240 g

Dimensions (mm)

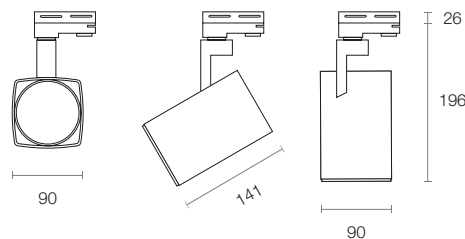

Technical Characteristics

Based on XTI154-WB-B-ND

LED Power	15W
LED Type	COB
Lumen Output	2004 lm
Luminous Flux	1460 lm
Efficacy	80.22 lm/W
Colour Temperature	2700K 3000K 3500K 4000K
Colour Technology	CRI 90+ CRI 93+ VIVID CRI 97+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Wide
System Power	18.2W Typical
Driver Model	Trend 150079-500 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	25-42V DC 500mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable DALI

General Characteristics

Category	Track Systems (Track Light)
Family	Track Spot
Surface	Ceiling
Mounting	Track Mounted
Ingress Protection	IP20



Scan to explore
XTI15 online

Track Spot XTI15

15W Track Mounted Spotlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Accessories *	Driver
XTI15	2.7 (2700K)	(CRI 90+ Standard)	WB (Wide)	W (White)	HL (Honeycomb Lens)	ND (Non-dimmable) DALI (DALI)
	3 (3000K)	V (CRI 93+ VIVID)		B (Black)		
	3.5 (3500K)	R (CRI 97+ Standard)				
	4 (4000K)					

Order Code **XTI154-WB-B-ND**

* Optional accessories

To configure this track light please visit
trendlighting.com.au/product/track-spot-XTI15

Trim Colour




W
White Trim




B
Black Trim

Accessories *




HL
Honeycomb Lens


Compatible 3 Circuit Track Systems




TRA3C
3 Circuit Track
Dimensions 33 x 35 mm
Max. Length 3000 mm
White | Black | Silver




TRA3C-DALI
3 Circuit DALI Track
Dimensions 33 x 35 mm
Max. Length 3000 mm
White | Black | Silver




TRA3CR
3 Circuit Recessed Track
Dimensions 56.2 x 35 mm
Max. Length 3000 mm
White | Black | Silver



TRA3CR-DALI
3 Circuit Recessed DALI Track
Dimensions 56.2 x 35 mm
Max. Length 3000 mm
White | Black | Silver



TRA3C-SA
3 Circuit Surface Mounted Monopoint
Dimensions Ø110 x 35 mm
White | Black



TRA3C-DALI-SA
3 Circuit Surface Mounted DALI Monopoint
Dimensions Ø143 x 35 mm
White | Black