



Scan to explore
XLC10 online

Maxiled XLC10

10W Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XLC10	3 (3000K)	(CRI 90+ Standard)	MB (Medium)	W (White)	LT (Leading & Trailing Edge)
	4 (4000K)				DALI (DALI) 110V (1-10V)

Order Code **XLC104-MB-W-LT**




To configure this downlight, please visit
trendlighting.com.au/product/maxiled-XLC10

Physical Characteristics

Trim Colour	White
Dimensions	Ø110 x 105 (H) mm
Spring Height	18 mm
Cutout	Circular 95 - 100 mm
Weight	650 g

Dimensions (mm)

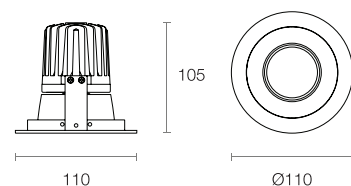

Product Features

- Recessed LED downlight with dual reflector design for visual comfort
- Manufactured with an aluminum body and finish
- A variety of sizes, power and trim options available (XLC25, XLC35, XLCL25 and XLCL35)
- CRI 90+ available in 3000K and 4000K CCT options
- Supplied with a remote driver

Product Attributes



Technical Characteristics

Based on XLC104-MB-W-LT

LED Power	10.5W
LED Type	COB
Lumen Output	1450 lm
Luminous Flux	1076 lm
Efficacy	91.97 lm/W
Colour Temperature	3000K 4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L80)
Beam Angle	Medium
System Power	11.7W Typical
Driver Model	Trend 150218-300 (L&T)
Input	180-265V AC 50/60 Hz
Output	30-42V DC 300mA
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge DALI 1-10V

General Characteristics

Category	Downlights
Family	Maxiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP20