

Scan to explore
XPL50 online

Maxipendant XPL50

50W Prismatic Pendant

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XPL50	3 (3000K)	(CRI 80+ Standard)	WB (Wide)	PRS (Prismatic)	ND (Non-dimmable)
	4 (4000K)				
	5 (5000K)				

Order Code **XPL504-WB-PRS-ND**



Product Features

- Suspended LED characterised by its clear prismatic ribbed diffuser and cover lens
- Large passive heatsink provides effective thermal management ensuring high output and long lifespan
- CRI 80+ available in 3000K, 4000K and 5000K CCT options
- Supplied with a remote driver

Product Attributes




To configure this pendant, please visit
trendlighting.com.au/product/maxipendant-XPL50

Physical Characteristics

Trim Colour	Prismatic
Dimensions	Ø415 x 385 (H) mm
Suspension Height	2000 mm Max
Weight	6250 g

Dimensions (mm)

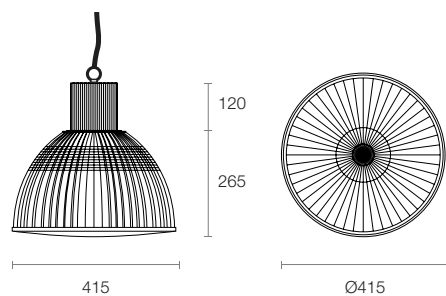

Technical Characteristics

Based on XPL504-WB-PRS-ND

LED Power	50W
LED Type	COB
Lumen Output	4200 lm
Luminous Flux	3205 lm
Efficacy	59.35 lm/W
Colour Temperature	3000K 4000K 5000K
Colour Technology	CRI 80+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L70)
Beam Angle	Wide

System Power	54W Typical
Driver Model	Trend 150032-400 (Non-dim)
Input	180-265V AC 50/60 Hz
Output	130-165V DC 400mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable

General Characteristics

Category	Pendants
Family	Maxipendant
Surface	Ceiling
Mounting	Suspended
Ingress Protection	IP20