



Scan to explore
XDF25 online

Midiled XDF25

25W IP65 Rated Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Insert Colour	Driver
XDF25	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	WI (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	BI (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	SI (Silver)	
	4 (4000K)				GI (Gold)	

Order Code **XDF254-WB-W-WI-LT**



To configure this downlight, please visit
trendlighting.com.au/product/midiled-XDF25

Product Features

- Recessed LED downlight with IP65 rating characterised by its quality, light efficiency and performance
- Manufactured with an aluminium body and powder coat finish
- A wide choice of power options and sizes available ([XDF10](#), [XDF15](#), [XDF35](#) and [XDF55](#))
- Large pin fin heatsink for optimal thermal management
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 93+ VIVID and CRI 97+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver


Product Attributes



Physical Characteristics

Trim Colour	White Black Silver
Insert Colour	White Black Silver Gold
Dimensions	Ø150 x 125 (H) mm
Spring Height	32 mm
Cutout	Circular 120 mm
Weight	570 g

Dimensions (mm)

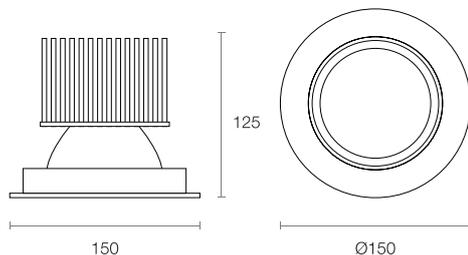

 Cutout Ø120 mm

Technical Characteristics

Based on XDF254-WB-W-WI-LT

LED Power	25W
LED Type	COB
Lumen Output	2955 lm
Luminous Flux	2441 lm
Efficacy	91.08 lm/W
Colour Temperature	2700K 3000K 3500K 4000K
Colour Technology	CRI 90+ CRI 93+ VIVID CRI 97+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Narrow Medium Wide

System Power	26.8W Typical
Driver Model	Trend 150020-700 (L&T)
Input	180-265V AC 50/60 Hz
Output	30-40V DC 700mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge DALI

General Characteristics

Category	Downlights
Family	Midiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP65



Scan to explore
XDF25 online

Midiled XDF25

25W IP65 Rated Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Insert Colour	Driver
XDF25	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	WI (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	BI (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	SI (Silver)	
	4 (4000K)				GI (Gold)	

Order Code **XDF254-WB-W-WI-LT**

To configure this downlight, please visit
trendlighting.com.au/product/midiled-XDF25

Trim Colour



W
White Trim



B
Black Trim



S
Silver Trim

Insert Colour



WI
White Insert



BI
Black Insert



SI
Silver Insert



GI
Gold Insert