# TREND
### LIGHT BY SOLID STATE

# Midiled XMC325
3 x 25W Recessed Adjustable Rectangular Downlight

| Product Code | Colour Temperature | Colour Technology | Beam Angle | Trim Colour | Driver |
|---|---|---|---|---|---|
| **XMC325** | 3 (3000K) | (CRI 90+ Standard) | MB (Medium) | W (White) | ND (Non-dimmable) |
| | 4 (4000K) | | | B (Black) | LT (Leading & Trailing Edge) |
| | | | | | DALI (DALI) |

Order Code **XMC3254-MB-W-ND**

## Product Features

• Triple recessed adjustable LED downlight in rectangular housing

• Also available in a single spot (XMC125) or as a twin configuration (XMC225)

• CRI 90+ available in 3000K and 4000K CCT options

• Anodised black heatsink for effective thermal management ensuring high output and long lifespan

• Supplied with a remote driver

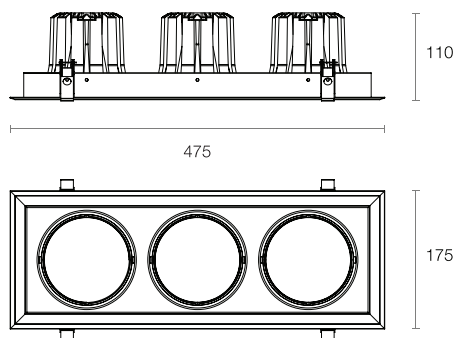To configure this downlight, please visit
trendlighting.com.au/product/midiled-XMC325

## Product Attributes

LED COB | CRI 90+ | IP20 | NON IC | NON DIM

## Physical Characteristics

| | |
|---|---|
| Trim Colour | White \| Black |
| Tilt Angle | 35° x 35° |
| Dimensions (LxWxH) | 475 x 175 x 110 mm |
| Spring Height | 35 mm |
| Cutout | Rectangular 455 x 160 mm |
| Weight | 2850 g |

## Dimensions (mm)



110

475

175

Cutout 455 x 160 mm

## Technical Characteristics
Based on XMC3254-MB-W-ND

| | |
|---|---|
| LED Power | 3 x 25W |
| LED Type | COB |
| Lumen Output | 8865 lm |
| Luminous Flux | 7500 lm |
| Efficacy | 94.70 lm/W |
| Colour Temperature | 3000K \| 4000K |
| Colour Technology | CRI 90+ |
| Colour Deviation | SDCM ≤ 3 |
| Lifetime | 50,000 hours (L80) |
| Beam Angle | Medium |

| | |
|---|---|
| System Power | 79.2W Typical |
| Driver Model | Trend 150020-700 (Non-dim) x 3 |
| Input | 180-265V AC 50/60 Hz |
| Output | 30-40V DC 700mA |
| Power Factor | >0.90 |
| Protection | OVP, OTP, OCP, SCP, OPP |
| Dimming | Non-dimmable \| Leading & Trailing Edge \| DALI |

## General Characteristics

| | |
|---|---|
| Category | Downlights |
| Family | Midiled |
| Surface | Ceiling |
| Mounting | Recessed |
| Insulation Contact | Non-IC |
| Ingress Protection | IP20 |

# Midiled XMC325

3 x 25W Recessed Adjustable Rectangular Downlight

| Product Code | Colour Temperature | Colour Technology | Beam Angle | Trim Colour | Driver |
|---|---|---|---|---|---|
| **XMC325** | 3 (3000K) | (CRI 90+ Standard) | MB (Medium) | W (White) | ND (Non-dimmable) |
| | 4 (4000K) | | | B (Black) | LT (Leading & Trailing Edge) |
| | | | | | DALI (DALI) |

Order Code **XMC3254-MB-W-ND**

To configure this downlight, please visit
trendlighting.com.au/product/midiled-XMC325

## Trim Colour

W
**White Trim**

B
**Black Trim**