



Scan to explore  
XSF10 online

# Surface XSF10

8W Surface Mounted Adjustable Downlight

| Product Code | Colour Temperature | Colour Technology  | Beam Angle       | Trim Colour | Driver                      |
|--------------|--------------------|--------------------|------------------|-------------|-----------------------------|
| XSF10        | 3 (3000K)          | (CRI 90+ Standard) | ADJ (Adjustable) | W (White)   | ND (Non-dimmable)           |
|              | 4 (4000K)          |                    |                  | B (Black)   | DALI (DALI)<br>110V (1-10V) |

Order Code **XSF104-ADJ-B-ND**



## Product Features

- Surface mounted LED spotlight with zoomable lens, allowing for a 20° to 70° adjustment in beam angle for easy and accurate control with a smooth beam distribution
- Fully adjustable design with 350° horizontal rotation and 90° vertical tilt, allowing for directional adjustment in a variety of lighting applications
- CRI 90+ available in 3000K and 4000K CCT options
- Supplied with an integral driver

## Product Attributes




To configure this downlight, please visit  
[trendlighting.com.au/product/surface-XSF10](http://trendlighting.com.au/product/surface-XSF10)

## Physical Characteristics

|             |                  |
|-------------|------------------|
| Trim Colour | White   Black    |
| Tilt Angle  | 90°              |
| Rotation    | 350°             |
| Dimensions  | Ø55 x 181 (H) mm |
| Weight      | 455 g            |

## Dimensions (mm)

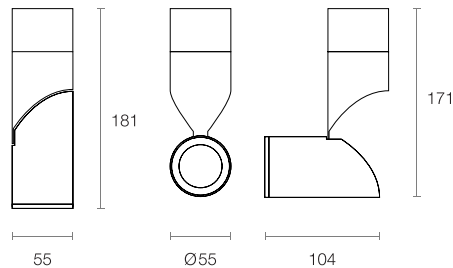

## Technical Characteristics

Based on XSF104-ADJ-B-ND

|                    |                             |
|--------------------|-----------------------------|
| LED Power          | 8W                          |
| LED Type           | COB                         |
| Lumen Output       | 913 lm                      |
| Luminous Flux      | 715 lm                      |
| Efficacy           | 78.57 lm/W                  |
| Colour Temperature | 3000K   4000K               |
| Colour Technology  | CRI 90+                     |
| Colour Deviation   | SDCM ≤ 2                    |
| Lifetime           | 50,000 hours (L80)          |
| Beam Angle         | Adjustable                  |
| System Power       | 9.1W Typical                |
| Driver Model       | Trend 150419-200 (Non-dim)  |
| Input              | 220-240V AC 50/60 Hz        |
| Output             | 26-40V DC 200mA             |
| Power Factor       | >0.90                       |
| Protection         | OVP, OTP, OCP, SCP, OPP     |
| Dimming            | Non-dimmable   DALI   1-10V |

## General Characteristics

|                    |                 |
|--------------------|-----------------|
| Category           | Downlights      |
| Family             | Surface         |
| Surface            | Ceiling         |
| Mounting           | Surface Mounted |
| Ingress Protection | IP20            |



Scan to explore  
XSF10 online

# Surface XSF10

8W Surface Mounted Adjustable Downlight

| Product Code | Colour Temperature | Colour Technology  | Beam Angle       | Trim Colour | Driver                      |
|--------------|--------------------|--------------------|------------------|-------------|-----------------------------|
| XSF10        | 3 (3000K)          | (CRI 90+ Standard) | ADJ (Adjustable) | W (White)   | ND (Non-dimmable)           |
|              | 4 (4000K)          |                    |                  | B (Black)   | DALI (DALI)<br>110V (1-10V) |

Order Code **XSF104-ADJ-B-ND**

To configure this downlight, please visit  
[trendlighting.com.au/product/surface-XSF10](http://trendlighting.com.au/product/surface-XSF10)

## Trim Colour



W  
White Trim



B  
Black Trim