

Scan to explore
ZWP44 online

Weatherproof ZWP44

30W IP65 & IK10 Rated Weatherproof Batten

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver	Emergency Kit*
ZWP44	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable) DALI (DALI) 110V (1-10V)	EMB (Maintained Backup)
	3 (3000K)					ENB (Non-maintained Backup)
	4 (4000K)					
	5 (5000K)					

Order Code **ZWP444-VW-W-ND**

* Optional emergency kit



Product Features


- Surface mounted weatherproof LED batten with durable polycarbonate body and tamper-proof stainless steel clips, providing a high level of impact resistance and ingress protection
- Optional battery backup kit available in maintained or non-maintained variants, meeting AS/NZS 2293 compliance
- CRI 90+ available in 2700K, 3000K, 4000K and 5000K CCT options
- Supplied with an integral driver

To configure this batten, please visit
trendlighting.com.au/product/weatherproof-ZWP44

Physical Characteristics

Trim Colour	White
Dimensions (LxWxH)	1270 x 140 x 95 mm
Weight	3.2 kg

Dimensions (mm)

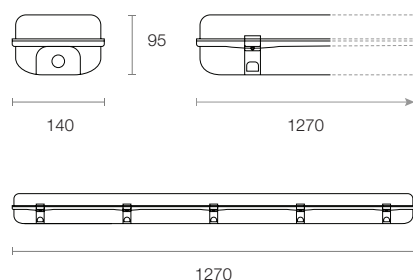

Product Attributes




Technical Characteristics

Based on ZWP444-VW-W-ND

LED Power	30W
LED Type	SMD
Lumen Output	4464 lm
Luminous Flux	3144 lm
Efficacy	92.47 lm/W
Colour Temperature	2700K 3000K 4000K 5000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L80 B10)
Beam Angle	Very Wide
System Power	34W Typical
Driver Model	Trend 150232 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	24V DC 2.08A
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable DALI 1-10V

General Characteristics

Category	Linears & Battens
Family	Weatherproof
Surface	Ceiling
Mounting	Surface Mounted
Ingress Protection	IP65
Impact Resistance	IK10



Scan to explore
ZWP44 online

Weatherproof ZWP44

30W IP65 & IK10 Rated Weatherproof Batten


Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver	Emergency Kit *
ZWP44	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable) DALI (DALI) 110V (1-10V)	EMB (Maintained Backup)
	3 (3000K)					ENB (Non-maintained Backup)
	4 (4000K)					
	5 (5000K)					

Order Code **ZWP444-VW-W-ND**

* Optional emergency kit

To configure this batten, please visit
trendlighting.com.au/product/weatherproof-ZWP44

Trim Colour

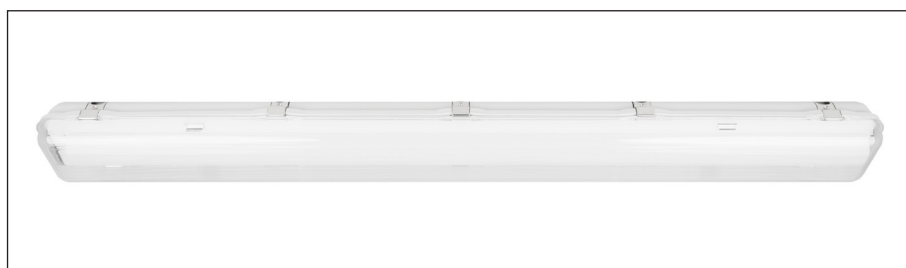

W
White Trim

Emergency Kits *

EMB Emergency Kit with Maintained Backup

- Illuminated all the time for safety but has the capacity to be switched on and off
- Continues to illuminate at a lower-level in the event of loss of power using its battery backup supply

ENB Emergency Kit with Non-maintained Backup

- Only illuminates in the event of a loss of power
- When power fails, the fixture switches on using its battery backup supply